


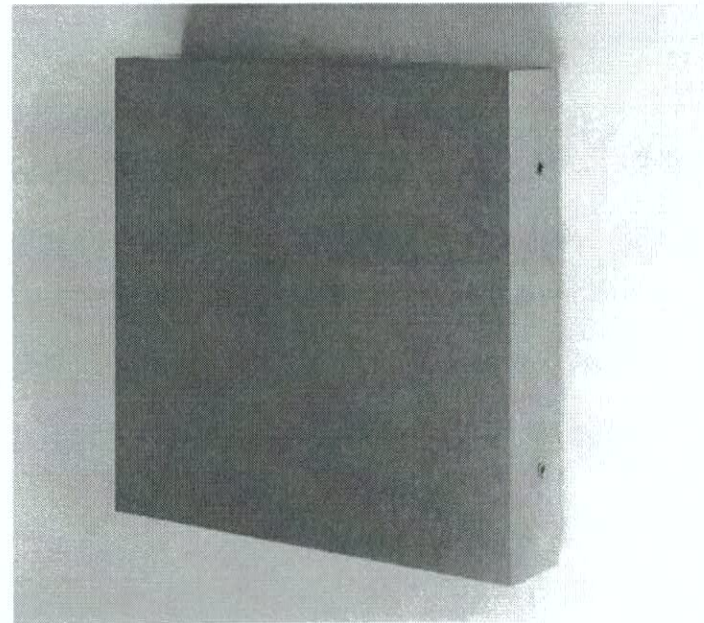

WEIGHT 4.45lbs

code source nom. flux finish culus IP

MIMIK 20 FLAT M

071178	25LED 13w Tot. 3000K	1365lm	Iron Grey	wet	65
071180	25LED 13w Tot. 3000K	1365lm	Steel Grey	wet	65
071182	25LED 13w Tot. 4000K	1470lm	Iron Grey	wet	65
071184	25LED 13w Tot. 4000K	1470lm	Steel Grey	wet	65

MIMIK 20 FLAT B


071186	50LED 26w Tot. 3000K	2730lm	Iron Grey	wet	65
071188	50LED 26w Tot. 3000K	2730lm	Steel Grey	wet	65
071190	50LED 26w Tot. 4000K	2940lm	Iron Grey	wet	65
071192	50LED 26w Tot. 4000K	2940lm	Steel Grey	wet	65

*consult factory for other available color temperatures


PERFORMANCE IN LIGHTING USA, inc.
2621 Keys Pointe
Conyers, Georgia 30013 - USA
voice 770.822.2115 - fax 770.822.9925
web www.pil-usa.com
e-mail info@pil-usa.com




Series of wall mounted low profile luminaires designed for general direct, indirect, or direct/indirect illumination. Full cut-off when used in direct versions. Housing and faceplate in copper free die cast aluminum. Fasteners in stainless steel. Micro-prismatic tempered glass diffuser for maximum visual comfort and optimal distribution. UV stabilized silicone gasket seal between housing and faceplate to ensure for weather tight IP65 rating. Integral 0-10v dimming driver included. Custom finishes available upon request.



MIMIK 20 FLAT B



MIMIK 20 FLAT M



7 7/8"

1 5/8"

7 7/8"

PRODUCT CODE
PROJECT
TYPE